




### DESCRIPTION:

The products are 6-pin thyristor opto-couplers. The device combines an AlGaAs infrared emitting diode as the emitter which is optically coupled to a monolithic silicon zero-crossing photo triac in a plastic DIP6 package with different lead forming options. The products are widely used in solenoid/valve controls, lighting controls, motor controls, temperature controls, static AC power switches, solid state relays, interfacing microprocessors up to 265 V<sub>AC</sub> peripherals.

### MAIN FEATURES

- High isolation 5000 VRMS
- DC input with zero-crossing photo triac output
- Operating temperature range -55 to 110
- REACH & RoHS compliance
- HBM: H3A ; MM: M4; CDM: C3
- CQC approved
- VDE approved
- UL approved

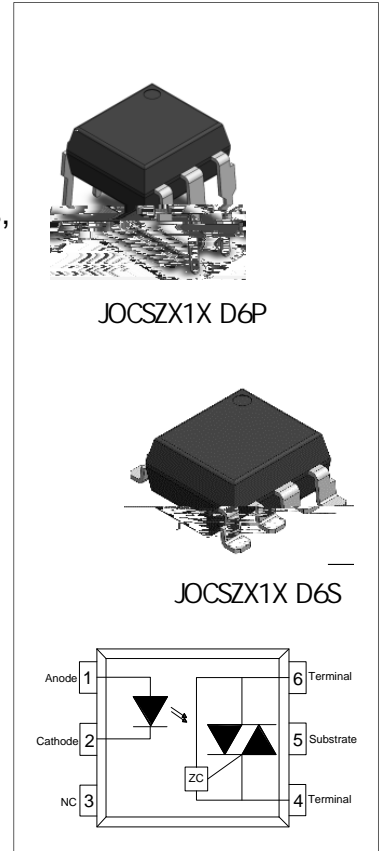

### ABSOLUTE MAXIMUM RATINGS (Temperature=25°C)

Parameter		Symbol	Value	Unit	
Input	Forward Current	I <sub>F</sub>	50	mA	
	Peak Forward Current	I <sub>FP</sub>	1	A	
	Reverse Voltage	V <sub>R</sub>	6	V	
	Power Dissipation	P <sub>D</sub>	75	mW	
Output	Off-state Output Terminal Voltage	V <sub>OFF</sub>	JOCSZ21X	600	V
			JOCSZ31X	800	
	Peak On-state Current (100μs pulse, 120 pps)	I <sub>TP</sub>	2	A	
	On-state RMS Current	I <sub>T(RMS)</sub>	100	mA	
	Peak Repetitive Surge Current (P <sub>w</sub> =10 ms)	I <sub>TSM</sub>	1.2	A	
Output Power Dissipation	P <sub>O</sub>	250	mW		
Total Power Dissipation	P <sub>tot</sub>	325	mW		
Isolation Voltage	V <sub>iso</sub>	5000	V <sub>rms</sub>		

Operating Temperature	$T_{opr}$	-55~110	
Junction Temperature	$T_j$	125	
Storage Temperature	$T_{stg}$	-55~125	
Soldering Temperature	$T_{sol}$	260	
Peak pulse voltage ( $T_j=25$ ; non-repetitive,off-state)	$V_{pp}$	1	kV

NOTE1: 100 $\mu$ s pulse, 100Hz frequency    NOTE2: AC for 1minute, R.H.=40~60%

**ELECTRICAL CHARACTERISTICS** (Temperature=25°C)

Parameter		Symbol	Condition	Min.	Typ.	Max.	Unit	
Input	Forward Voltage	$V_F$	$I_F=10mA$	-	1.2	1.5	V	
	Reverse Current	$I_R$	$V_R=6V$	-	-	1	$\mu A$	
	Input Capacitance	$C_{in}$	$V=0, f=1kHz$	-	10	-	pF	
Output	Peak Off-state Current, Either Direction	$I_{OFF}$	$V_{OFF}=Rated V_{OFF}$ $I_F=0$	-	-	100	nA	
	Peak On-state Voltage, Either Direction	$V_{TM}$	$I_{TM}=100mA$	-	1.7	2.5	V	
	Critical Rate of Rise of Off-state voltage	dV/dt	$V_{PEAK}= Rated V_{PEAK}$ $I_F=0$	2000	-	-	V/ $\mu$ s	
Transfer Characteristics	LED Trigger Current	JOCSZ21A JOCSZ31A	$I_{FT}$	Terminal Voltage=3V $I_{TM}=100mA$	-	-	10	mA
		JOCSZ21B JOCSZ31B			-	-	5	
		JOCSZ21C JOCSZ31C			-	-	3	
	Holding Current	$I_H$	$I_{TM}=2mA,$ $I_F=Rated I_{FT}$	-	500	-	$\mu A$	
	Isolation Resistance	$R_{ISO}$	DC500V 40~60%R.H.	$10^{12}$	$10^{14}$	-		
	Floating Capacitance	$C_{IO}$	$V=0,$ $f=1MHz$	-	10	-	pF	
	Response Time	$t_{on}$	$V_D=6V,$ $R_L=100$ , $I_F=20mA$	-	15	50	$\mu s$	
Zero-crossing Characteristics	Inhibit Voltage	$V_{IH}$	$I_F=Rated I_{FT}$	-	-	20	V	
	Leakage in Inhibited State	$I_{OFF2}$	$I_F=Rated I_{FT},$ $V_{OFF}=Rated V_{OFF}$	-	-	1.5	mA	


NOTE3: Test voltage must be applied within dV/dt ratings.    NOTE4: Refer to Fig.14 & Fig.15




Ambient Temperature

Temperature

**FIG.7:** Normalized On-state Terminal Voltage vs. Ambient Temperature

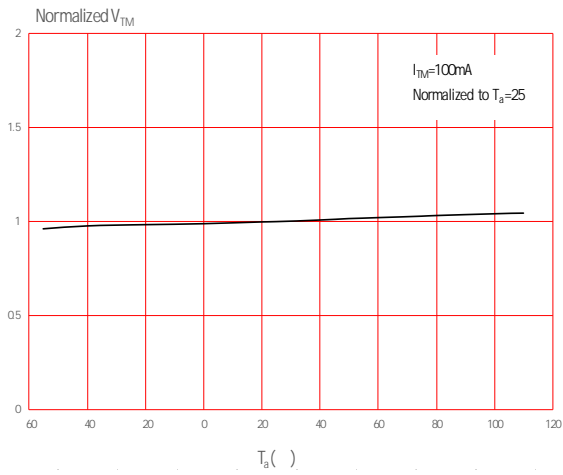

**FIG.8:** On-state Terminal Voltage vs. On-state Terminal Current

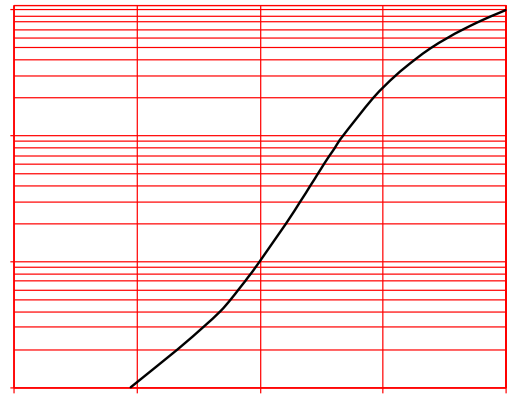

TEST CIRCUITS

FIG.12: Test Circuits of Turn On Time

FIG.13: Waveforms of Turn On Time

Fig.14: Test Circuits of dV/dt



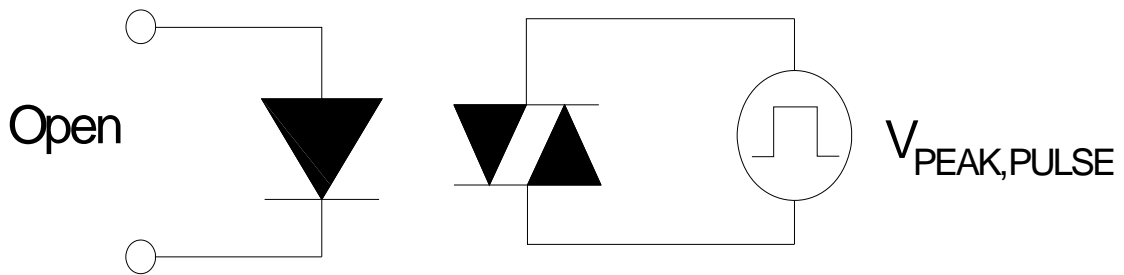


Fig.15: Waveforms of dV/dt



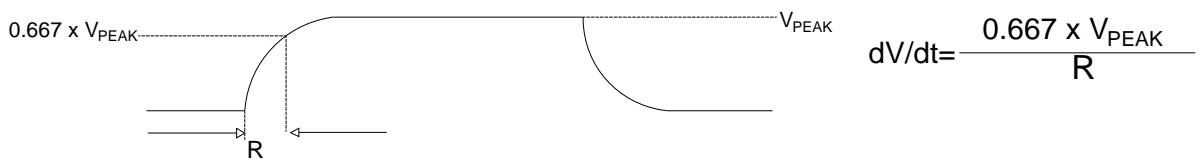


Option SMD Type:

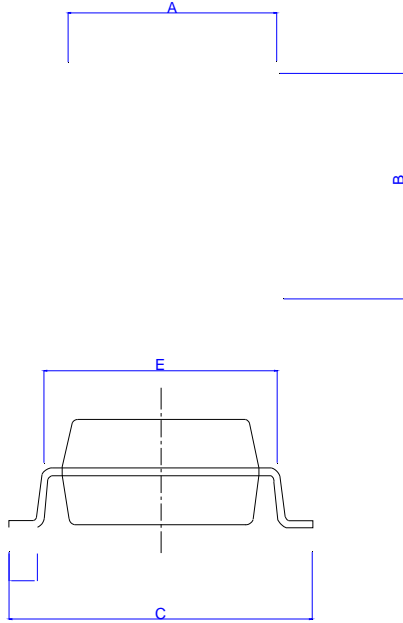

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	6.20		6.60	0.244		0.260
B	6.92		7.32	0.272		0.288
C	9.50		10.50	0.375		0.413
D	3.20		3.60	0.126		0.142
E	7.32		7.92	0.288		0.312
F	0.05		0.35	0.002		0.014
G	0.16		0.36	0.006		0.014
H	0.60		1.40	0.024		0.055
I	0.90		1.50	0.035		0.059
J	3.30		3.90	0.130		0.154
K	2.29		2.79	0.090		0.110


TUBE SPECIFICATIONS (Dimensions in mm unless otherwise stated)

Standard DIP

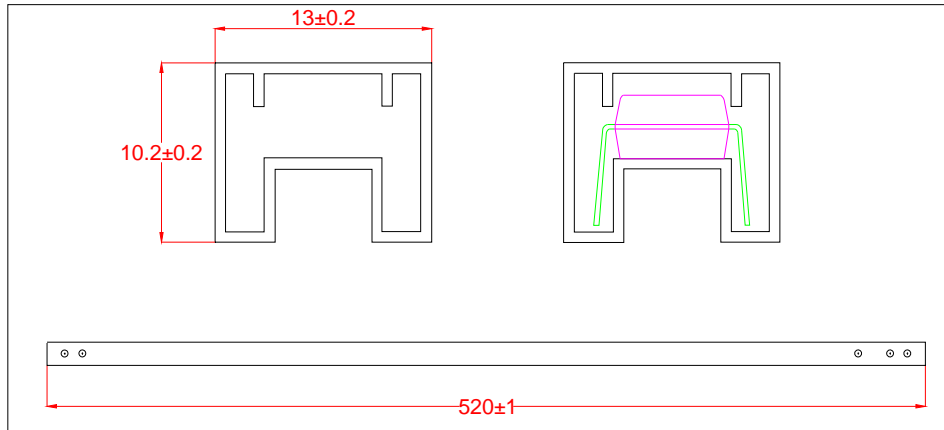

CARRIER TAPE SPECIFICATIONS (Dimensions in mm unless otherwise stated)


Option S/L

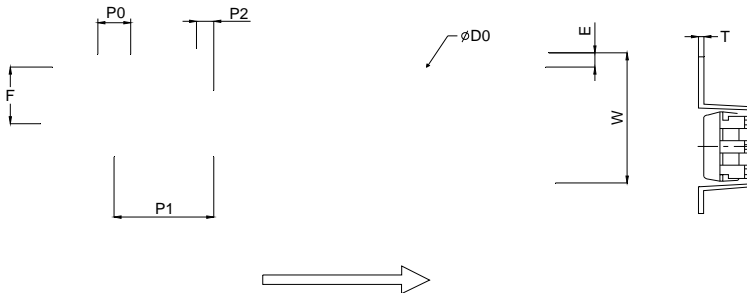


Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
D0		1.50	1.60		0.059	0.063
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	11.90	12.00	12.10	0.469	0.472	0.476
P2	1.90	2.00	2.10	0.075	0.079	0.083
E	1.65	1.75	1.85	0.065	0.069	0.073
F	7.40	7.50	7.60	0.291	0.295	0.299
T	0.35	0.40	0.45	0.014	0.016	0.018
W	15.70	16.00	16.30	0.618	0.630	0.642

REFLOW INFORMATION


α 5

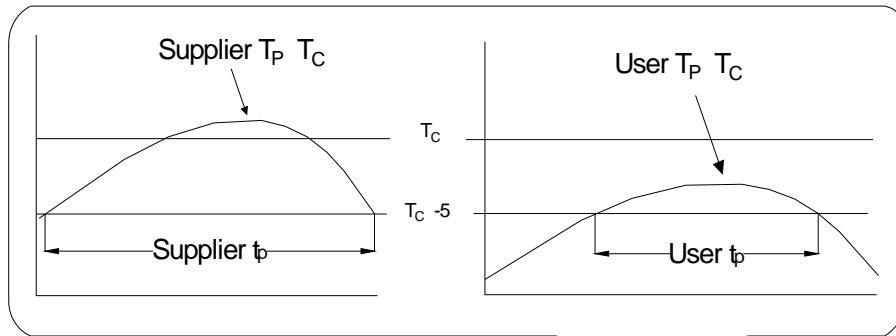

Temperatur:

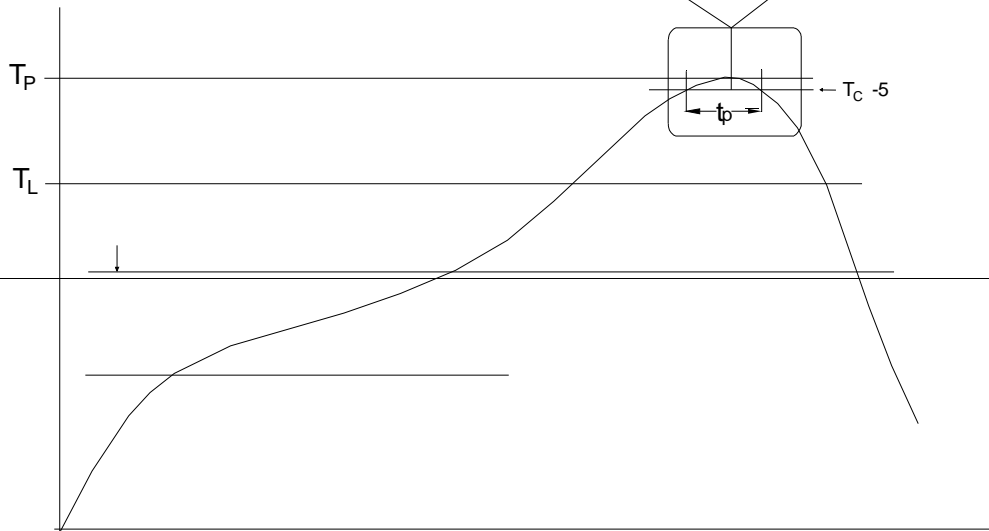

WAVE SOLDERING

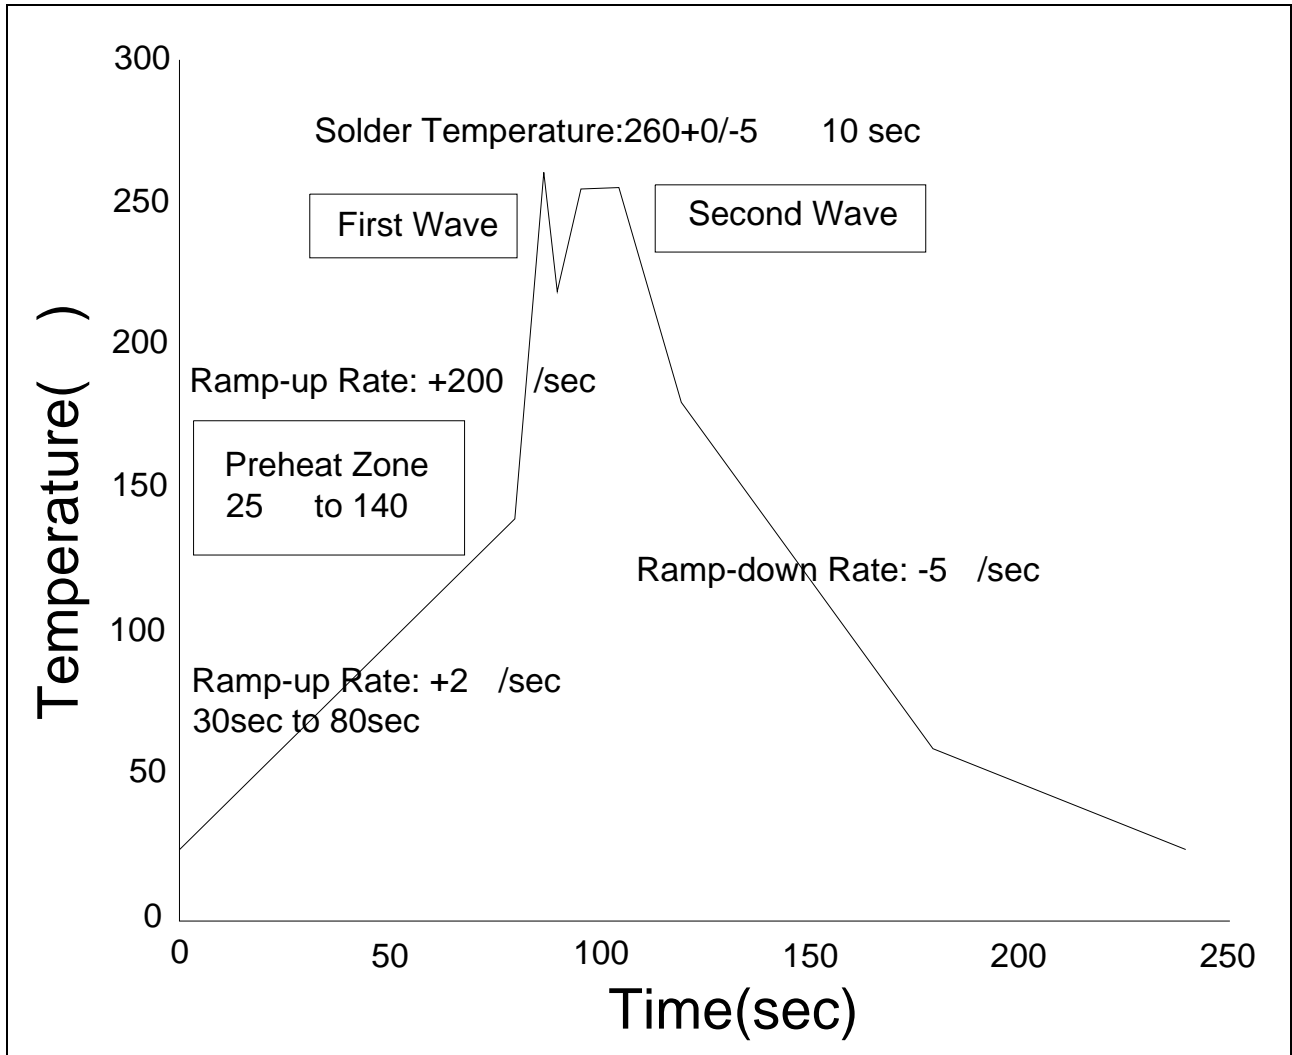

HAND SOLDERING BY SOLDERING IRON


Soldering Temperature	360± 5
Soldering Time	3s max.

Note:

1. Reflow soldering is recommended at the temperatures and times shown, no more than three times.
2. Avoid direct contact between the epoxy body and any tools or surfaces exceeding its maximum storage temperature.
3. Application of pressure on the epoxy body is prohibited at elevated temperatures. In specific scenarios, any applied force must not exceed 2.5N.
4. Ensure the component has cooled to ambient temperature before proceeding with any subsequent manufacturing steps.
5. The component has a shelf life of one year when stored under standard conditions.
6. Recommend storage Temp.: 0~40°C;  
Recommend storage Humidity: <60%;  
MSL level: MSL 1

Information furnished in this document is believed to be accurate and reliable. However, Jiangsu JieJie Microelectronics Co., Ltd. assumes no responsibility for the consequences of use without consideration for such information nor use beyond it. Information mentioned in this document is subject to change without notice, apart from that when an agreement is signed, Jiangsu JieJie complies with the agreement.

Products and information provided in this document have no infringement of patents. Jiangsu JieJie assumes no responsibility for any infringement of other rights of third parties which may result from the use of such products and information. This document supersedes and replaces all information previously supplied.

 is a registered trademark of Jiangsu JieJie Microelectronics Co., Ltd.

Copyright © 2026 Jiangsu JieJie Microelectronics Co., Ltd. All rights reserved.