


$V_p$	45	kV
-------	----	----

ELECTRICAL CHARACTERISTICS

Symbol	Test Condition	Quadrant	Value	Unit
$I_G$	$V_D = R, L$	- -	0	$\mu A$
$V_G$		- -	1	V
$V_G$	$V_D = 10, T_j = 25, R_L = k$	- -	0	V
$I_L$	$I_G = 2 \mu A$	-	5	$\mu A$
			5	$\mu A$
$I_H$	$I_T = 10$		5	$\mu A$
$\tau$	$V_D = 0, V_G = 10, n, T_j = 25$		0	V/ $\mu s$
$dI/dt$	$V_G = 10V/\mu s, T_j = 25$		3	$\mu A$
$t_b$	$I_G = 2 \mu A, I_A = 0 \mu A, I_R = 10 \mu A, T_j = 25$	M	5	$\mu s$
$t_b$			5	
$V_C$	$I_C = 10, p = 10$		0.5	V

5

ORDERING INFORMATION ie1-3

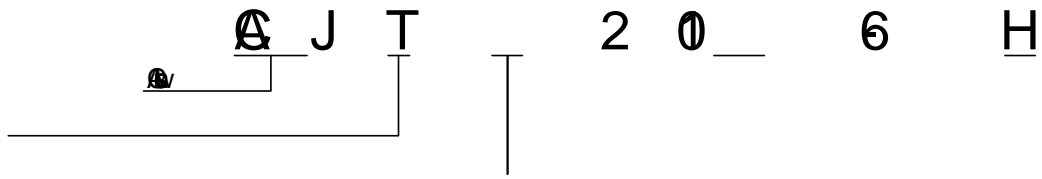





## ORDERING INFORMATION

Order code	Voltage $V_{DRM}/V_{RRM}$ (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
ACJT210-6H	600	10	TO-251	80	Tube

PACKAGE MECHANICAL DATA

