




JCT640CH 40A SCR

Rev.A.1.1

DESCRIPTION:

With high  
 640CH SCR  
 It is especially  
 suitable for  
 -220C



MAIN FEATURES

ABSOLUTE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Storage temperature	$T_s$	-40-150	
Operating junction temperature	$T_j$	-40-150	
Reverse peak voltage (T <sub>j</sub> =25 °C)	$V_{DRM}$	600	V
Reverse rms voltage (T <sub>j</sub> =25 °C)	$V_{RRM}$	600	V
Avg. current (T <sub>c</sub> 134 °C)	$I_T(AV)$	25	A
RMS current (T <sub>c</sub> 134 °C)	$I_T(RMS)$	40	A
Non-repetitive peak current (t <sub>p</sub> =10ms, T <sub>j</sub> =25 °C)	$I_{TSM}$	500	A
Non-repetitive peak current (t <sub>p</sub> =8.3ms, T <sub>j</sub> =25 °C)		540	
Surge current (t <sub>p</sub> =10ms, T <sub>j</sub> =25 °C)	$I^2t$	1250	A <sup>2</sup> s
Gate current (I <sub>G</sub> =2x I <sub>GT</sub> , f = 100Hz)	di/dt	180	A/μs
Peak gate current (t <sub>p</sub> =20μs, T <sub>j</sub> =150 °C)	$I_{GM}$	10	A
Avg. gate power (T <sub>j</sub> =150 °C)	$P_{G(AV)}$	1	W



ORDERING INFORMATION


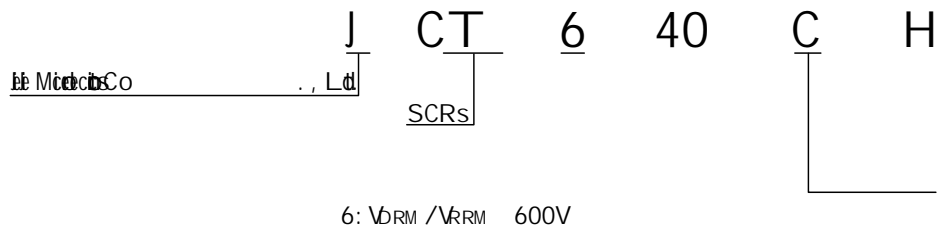


FIG.2: RMS  $\rho$  -  $\delta$  curves  
data







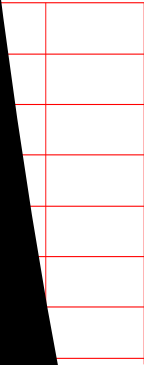

If you need this data sheet, please contact us.  
 We are JieJie Microelectronics Co., Ltd. and we  
 are always ready to serve you.  
 If you have any questions, please contact us.  
 For more information, please visit our website.  
 Product information: JCT640CH  
 We are always ready to serve you.  
 This data sheet is for the JCT640CH product.  
 Copyright © 2025 JieJie Microelectronics Co., Ltd.  
 All rights reserved.