


$\frac{P_{jmax}}{T_{jmax} - T_{amb}}$	P_{DM}	2	W
(j=25 ; $\theta_{j-c} = 10$; $\theta_{c-a} = 8$)			

ORDERING INFORMATION

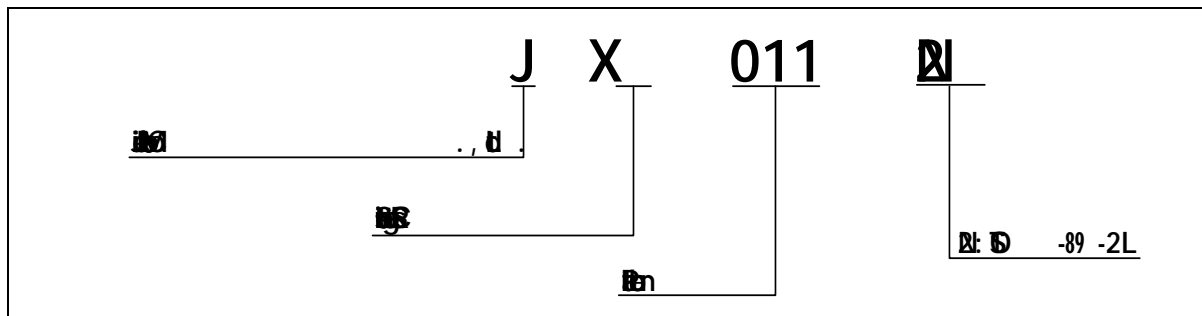

MARKING





FIG.1: 



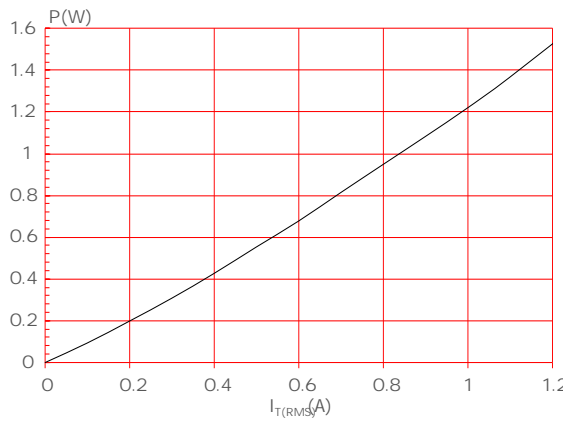



FIG.2: 




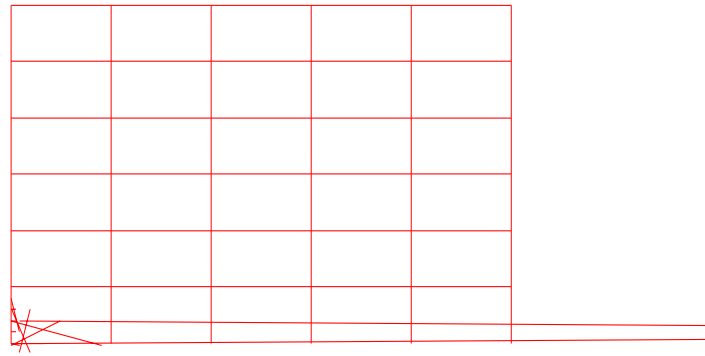


FIG.7: $I_{GT+HL}(T)/I_{GT+HL}(T=25)$

I_{GT}

$I_{L\&H}$



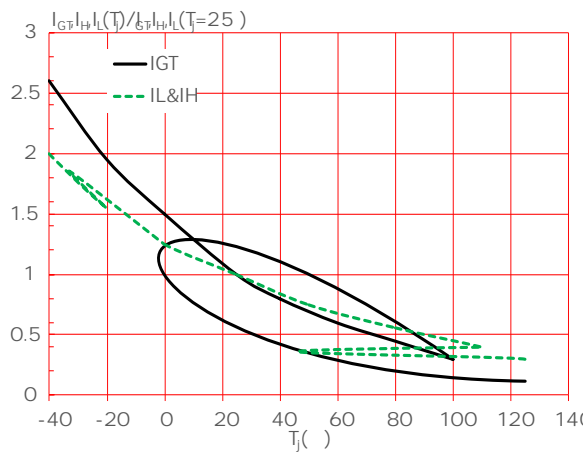

ORDERING INFORMATION

Order code	Voltage V_{DRM}/V_{RRM} (V)	IGT(μ A)	Package	Base qty. (pcs)	Delivery mode
JX011N2	800	200	SOT-89-2L	4,000	Tape & Reel

Document Revision History

Rev	Rev	Rev
A .12, 2023	A 1.0	甲
016, 2025	A1.1	乙

PACKAGE MECHANICAL DATA



JX0

