


JST06A-800TW

I_{DC}	$p=20\%$ ($T_j = 25^\circ C$)	I_{DM}	4	A
I_{PK}	$j=25\%$)	P_{GM}	0.5	W
I_{AV}		P_{DM}		

ORDERING INFORMATION

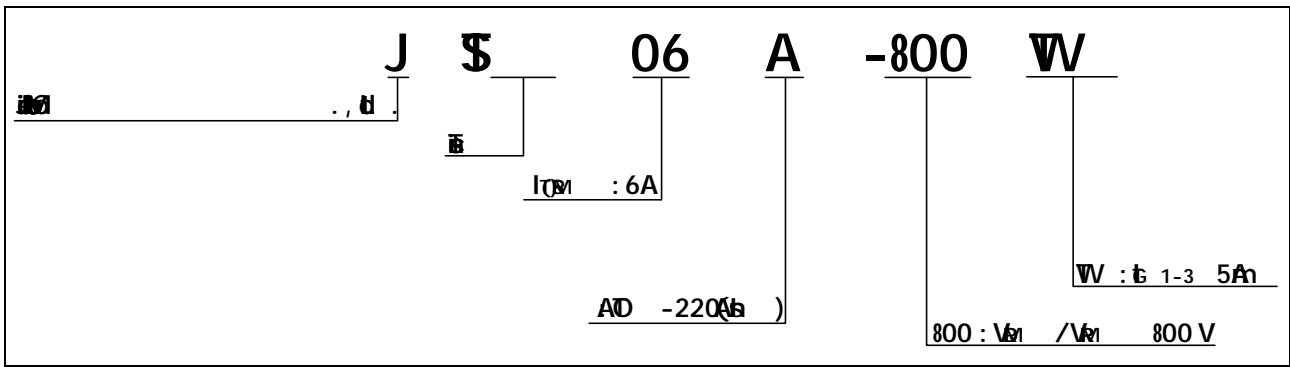

MARKING

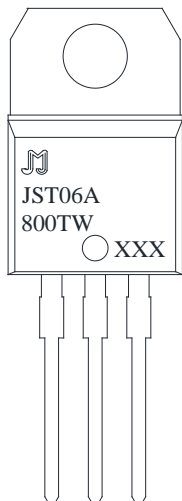


FIG.1: ~~Figure 1~~

~~Figure 1~~


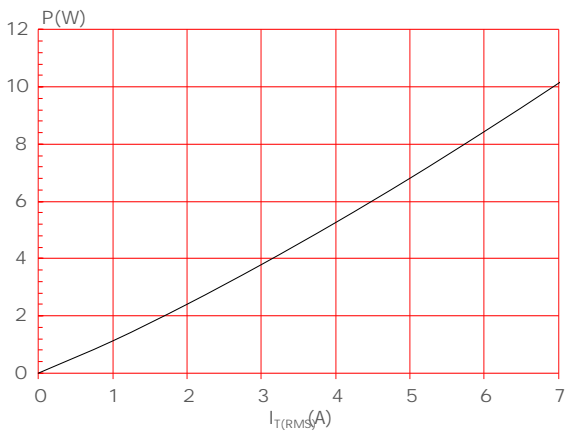


FIG.2: ~~Figure 2~~

~~Figure 2~~



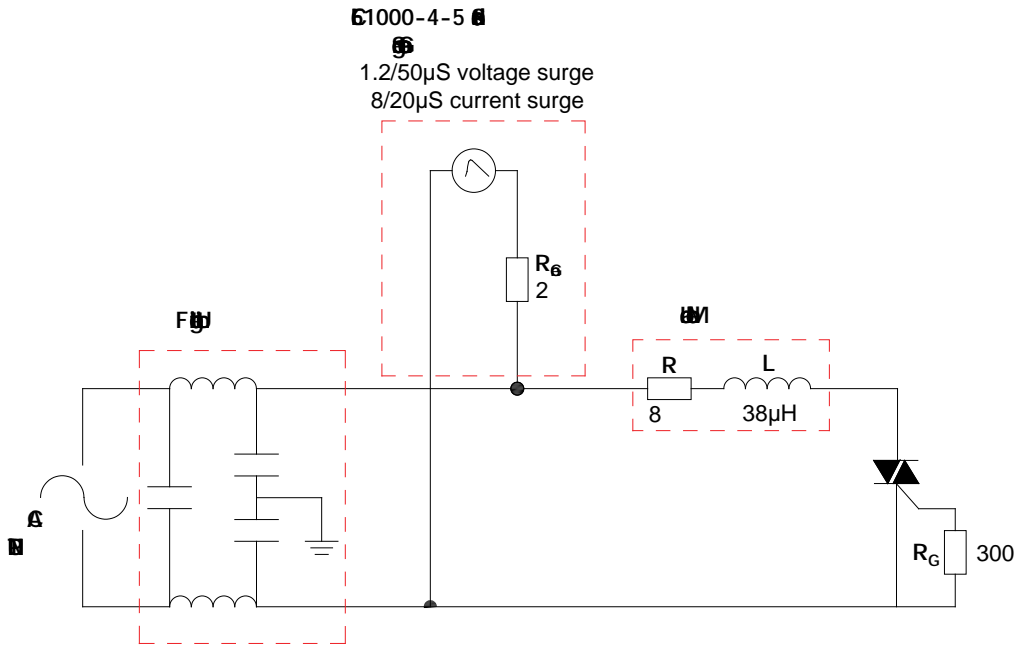

ORDERING INFORMATION

Order code	Voltage V _{DRM} /V _{RRM} (V)	IGT(mA)	Package	Base qty. (pcs)	Delivery mode
		- -			
JST06A-800TW	800	5	TO-220A(Ins)	50	Tube

Document Revision History

Rev	Rev	Rev
A11, 2023	A 1.0	甲
C11, 2025	A 1.1	Re

