



BM

L D .

3 0 A R

R A 1

DESCRIPTION:

1 3 V 0 b 0
 0/ 0
 0
 0
 0 0
 0 -2 0

MAIN FEATURES


ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter	Unit	Value	Notes
T_g	Storage Temperature	°C	-40 to 100	
T_j	Junction Temperature	°C	-40 to 150	
V_{BM}	Breakdown Voltage	V	60	
V_{RM}	Reverse Maximum Voltage	V	60	
I_{RM}	Reverse Maximum Current	A	0.08	


ELECTRICAL CHARACTERISTICS


Symbol	Parameter	Unit	Min	Max	Typ
I_G	$V_D = 10V$ $R_L = 3k$	-	-	0	An
				2	
V_G		A	11	13	V
V_D	$V_D = 10V$ $R_L = 3k$ $T_j = 25^\circ C$	AL	11	13	V
I_L	$I_G = 2mA$	-	-	5	An
				3	
I_H	$I_T = 5mA$				

ORDERING INFORMATION

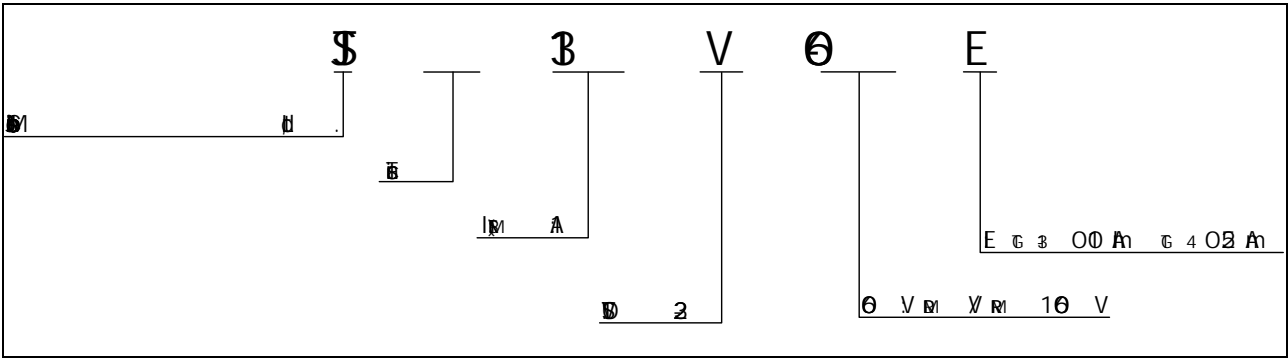

MARKING

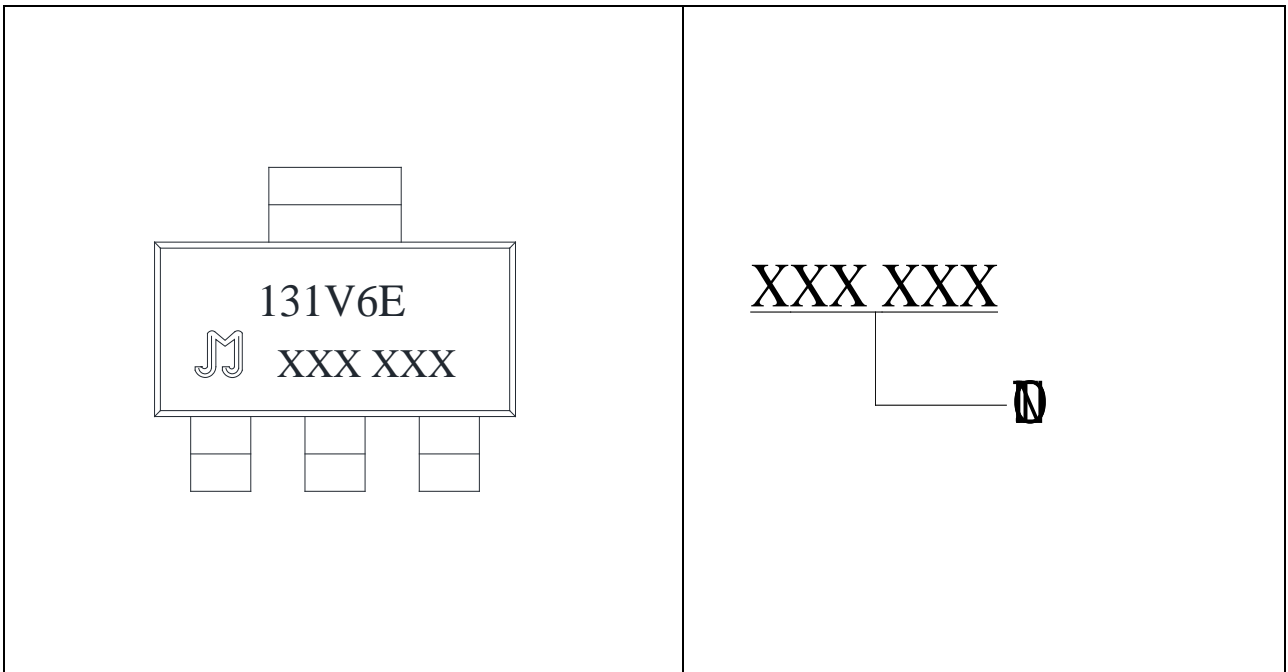


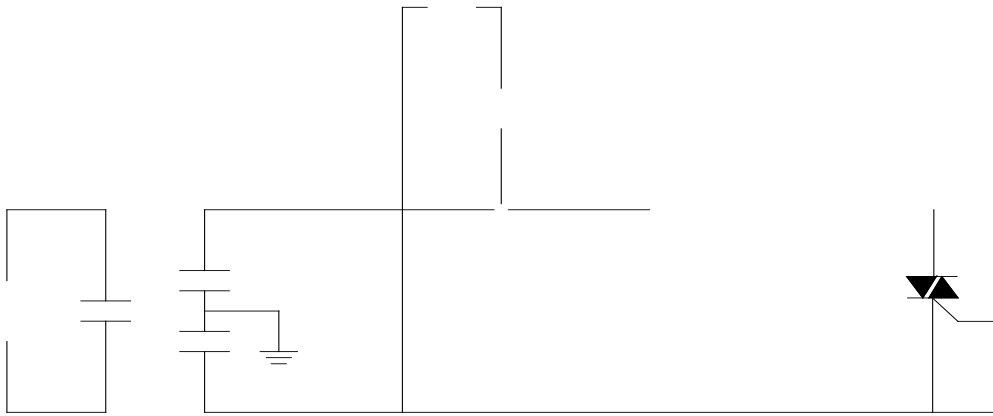

5

5 5 M

DELIVERY MODE

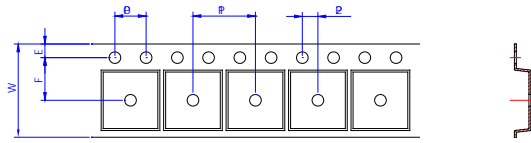

R	B					
	M			b		
	M	ḡ	M	M	ḡ	M
W	-		0	-		0
E	5	5 8		0 0 0		
F	5	0 5		0 0 0		
D		5 0			0 0	
D		-	-			
0	0	0 0		0	0 0	
P	0	0 0		0	0 0	
2	0	0 0		0	0 0	
0	0	0 0		5	5 8	
A	0	0 0		0	0 0	
B	5	2 3		0	0 0	
0	0	0 0		0	0 0	
T	0	0 0		0	0 0	

